
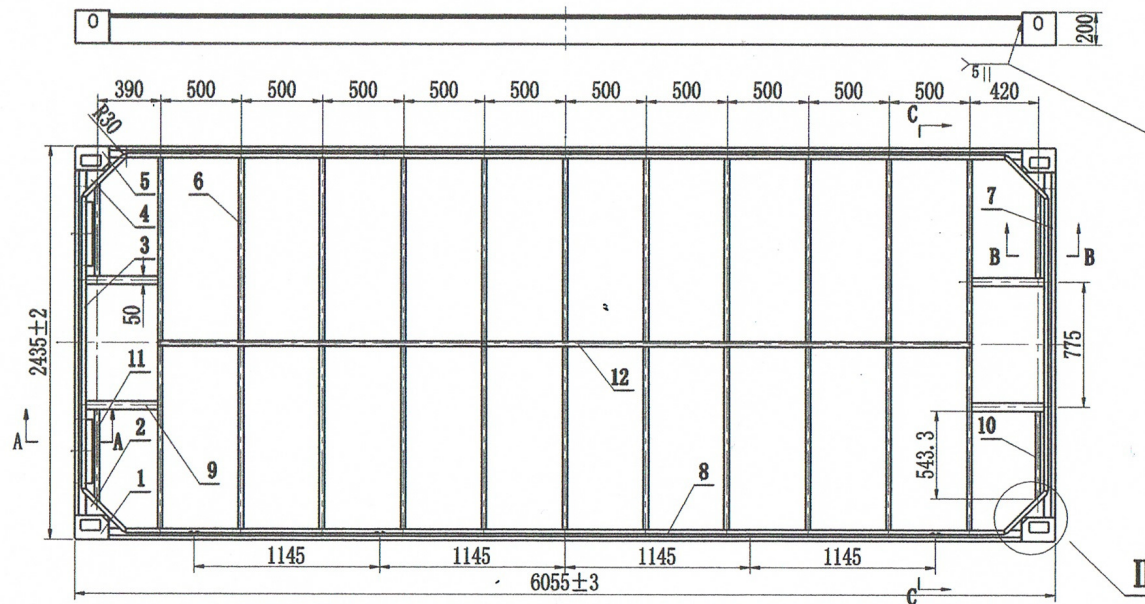


A-A
1:3

B-B
1:3

I
1:3

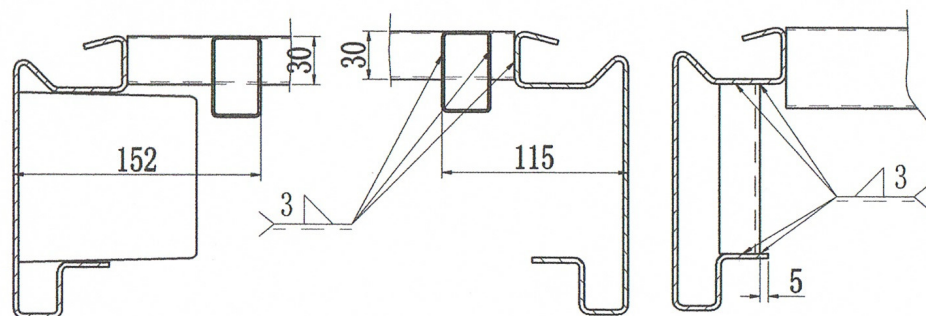

12	short rail (1)	plate Q235/T=1.0, [10X30X10, L=5030	1
11	short cross beam (二)	Q235/square bar 30X50X1.5, L=573	2
10	short cross beam (一)	Q235/square bar 30X50X1.5, L=543	2
9	short rail (2)	Q235/square bar 30X50X1.5, L=442	4
8	top rail long side	welded	2
7	top rail short side(二)	plate SS400/δ=3.0, bended, L=2131	1
6	cross beam	Q235/square bar 30X50X1.5, L=2295	11
5	corner fitting(L)	welded	2
4	connector for corner(R)	plate SS400/δ=3.0, bended	2
3	top rail short side(一)	welded	1
2	connector for corner(L)	plate SS400/δ=3.0, bended	2
1	corner fitting(L)	welded	2

welded

frame of roof 3(ISO)

1

1:30